


S T A N D A R D F I N I S H E S

Black, White, & Silver

UP TO 133 lm/W PERFORMANCE				
INDIRECT LIGHT				
DIRECT LIGHT	375 lm/ft	500 lm/ft	750 lm/ft	1000 lm/ft
375 lm/ft	23.3	26.9	33.6	41.4
500 lm/ft	27.4	31.0	37.7	45.5
750 lm/ft	35.6	39.2	45.9	53.7
1000 lm/ft	43.9	47.5	54.2	62.0
1250 lm/ft	52.1	55.7	62.4	70.2

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C

WATTS PER FOOT

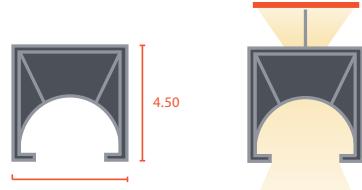

LUX | ENABLED



O R D E R G U I D E

ARX.4 - P - DI												
A	B	C	D	E	F	G	H	I	J	K	L	M
EXAMPLE ARX.4 - P - DI	1000	500	6	40K	8	1	UNV	S1	W	9C	24	WF, WC

N (Multiple Selections)

LIGHT LOSS FACTOR		
CCT	CRI	%
4000K	84+	100%
3500K	84+	97.1%
3000K	84+	95.7%
2700K	84+	94.1%
4000K	92+	88.9%
3500K	92+	85.5%
3000K	92+	83.8%
2700K	92+	82.4%

O P T I O N S

A. MODEL	B. DIRECT DISTRIBUTION	C. INDIRECT DISTRIBUTION	D. LENGTH	E. COLOR TEMPERATURE	F. CRI	
ARX.4 - P - DI	375	375 lm/ft	2	27K	8	80 + CRI
	500	500 lm/ft	3	30K	9	90 + CRI
	750	750 lm/ft	4	35K		
	1000	1000 lm/ft	5	40K		
	1250	1250 lm/ft	6			
XXX	Custom lm/ft	Custom lm/ft	7			
			8			
			XXX	System Run		

N O T E S

Consult factory for outputs between min and max.	Consult factory for outputs between min and max.	90 CRI option has an R9 value greater than 60.
--	--	--

G. CIRCUIT	H. VOLTAGE	I. DRIVER	J. FINISH	K. MOUNTING							
1	1-Circuit	UNV	120-277v	S1	1% Dimming (0-10v) Lutron Hi-Lume 1% Fade to Black	DALI	DALI 2.0 Compatible	W	White	9C	9/16 in Tee Clip
2	2-Circuit	347	347v	LDE1	0.1% ElxoLED 1% Dexal	ELO		B	Black	15C	15/16 in Tee Clip
				DXL				S	Silver	SC	Screw Slot Tee Clip
								CC	Custom Colors	HC	Hard Ceiling

347 may not be available in all configurations.	AWNR-W, AWNR-B, VDO, VRF, SPD, & CLM options supplied with DXL driver standard.	Consult factory for custom colors. (power feeds and canopies excluded)
---	---	---

O P T I O N S

L. SUSPENSION LENGTH	M. POWER FEEDS & CANOPIES	N. CONTROLS & FACTORY OPTIONS			
24	24 in	WF White Power Feed	Q. NONE Leave Blank	SPD Osram SensiLUM	Q. EB Emergency Battery (10-Watt)
42	42 in	BF Black Power Feed	Q. AWNR-W Lutron Athena Wire-	Daylight/Harvest/Occ	Q. EC Emergency Circuit
102	102 in	SF Silver Power Feed	Less Node (RF-only) in White	Osram Connecting	NL Night Light Circuit
150	150 in	WC White Canopy	Lutron Athena Wire-	Light Module (CLM)	SLP Slope Ceiling
		BC Black Canopy	Less Node (RF-only) in Black	Wattstopper Daylight	BAT Batwing (Indirect Only)
		SC Silver Canopy	Lutron Vive (RF/Daylight/Occ)	Sensor (FD-301)	FO Flat Open End Cap
			Lutron Vive (RF Fixture Control)	Wattstopper Occ Sensor (FS-205v2)	FC Flat Closed End Cap
				Enlighted Daylight/Harvesting Occ (SU-5E-01)	

Each individual suspension length is adjustable.	Select feed and canopy choice.	AWNR-W, AWNR-B, VDO, VRF, SPD, & CLM options supplied with DXL driver standard.
		Sculpted end cap is standard.



LIGHT SOURCE

Long life name brand LED chips and boards to ensure the highest of quality while providing even and smooth illumination throughout our luminaires.

Our luminaires are available in 2700K, 3000K, 3500K and 4000K color temperature.

Optional 80CRI or 90CRI available in all CCT options.

LUMEN MAINTENANCE

The projected lumen maintenance of the name brand mid-powered LED's are projected to maintain 80% (L80) of their initial output for +80,000 hours.

CONSTRUCTION

The housings are constructed of (6063T5) extruded aluminum. Our internal joiner system is designed to the highest of standards to ensure our precision cut housings align and fit tightly without light leak. Our precision fitting end caps are constructed out of die cast aluminum and our steel reflectors are painted white.

FINISH

Polyester powder, low gloss textured paint finish applied after a multi-stage pretreatment. Standard luminaire finishes include white, silver, and black. Custom color options are available. (Consult Factory).

OPTICS

Direct: Curved reflector system. Indirect: Snap-in Extruded frosted Acrylic Lens.

DRIVERS

All of our luminaires come standard with 1% dimming and THD <20% utilizing 0-10v constant current protocol. 120v/277v is standard with the option of 347v. Driver ambient operating temperature -30°C to +50°C.

EMERGENCY

An integral factory installed 10 watt emergency battery pack. Emergency circuit and Night Light circuit options are available.

LUMINAIRE LENGTH

Our ARX.4 Pendant Direct/Indirect luminaire series are available in 2', 3', 4', 5', 6', 7' and 8' individual lengths or continuous row configurations. Continuous row configurations are joined together on-site utilizing the joiner kits provided.



C O N T I N U O U S R U N O R D E R G U I D E S

Please use the following run guides for fixture ordering. If your product will require a submittal, our in-house Application Engineering Team will work closely with you on your project.

ALUMINUM PRODUCT ORDER GUIDE	
RUN LENGTH (ft)	RUN CONFIGURATION - SECTION LENGTHS
9	6' + 3'
10	6' + 4'
11	6' + 5'
12	6' + 6'
13	6' + 7'
14	8' + 6'
15	8' + 7'
16	8' + 8'
17	6' + 5' + 6'
18	6' + 6' + 6'
19	6' + 7' + 6'
20	8' + 4' + 8'
21	8' + 5' + 8'
22	8' + 6' + 8'
23	8' + 7' + 8'
24	8' + 8' + 8'
25	5' + 8' + 8' + 4'
26	4' + 6' + 6' + 6' + 4'
27	6' + 8' + 8' + 5'
28	6' + 8' + 8' + 6'
29	7' + 8' + 8' + 6'

*Standard Run Configurations Shown, Consult Factory for Custom Configurations.

ALUMINUM PRODUCT ORDER GUIDE	
RUN LENGTH (ft)	RUN CONFIGURATION - SECTION LENGTHS
30	6' + 6' + 6' + 6' + 6'
31	6' + 6' + 7' + 6' + 6'
32	8' + 8' + 8' + 8'
33	5' + 8' + 8' + 8' + 4'
34	6' + 8' + 8' + 8' + 4'
35	6' + 8' + 8' + 8' + 5'
36	6' + 8' + 8' + 8' + 6'
37	8' + 8' + 5' + 8' + 8'
38	8' + 8' + 6' + 8' + 8'
39	8' + 8' + 7' + 8' + 8'
40	8' + 8' + 8' + 8' + 8'
41	5' + 8' + 8' + 8' + 8' + 4'
42	6' + 8' + 8' + 8' + 8' + 4'
43	6' + 8' + 8' + 8' + 8' + 5'
44	6' + 8' + 8' + 8' + 8' + 6'
45	7' + 8' + 8' + 8' + 8' + 6'
46	3' + 8' + 8' + 8' + 8' + 8' + 3'
47	4' + 8' + 8' + 8' + 8' + 8' + 3'
48	8' + 8' + 8' + 8' + 8' + 8'
49	5' + 8' + 8' + 8' + 8' + 8' + 4'
50	6' + 8' + 8' + 8' + 8' + 8' + 4'

*Standard Run Configurations Shown, Consult Factory for Custom Configurations.

