



lm/W PERFORMANCE PAGE 2 & 3



STANDARD FINISHES
Black, White, & Silver



LIGHT LOSS FACTOR		
CCT	CRI	%
4000K	84+	100%
3500K	84+	97%
3000K	84+	95.7%
2700K	84+	94.1%
4000K	92+	88.9%
3500K	92+	85.5%
3000K	92+	83.8%
2700K	92+	82.4%

LUX | ENABLED



Suitable for Damp Locations



ORDER GUIDE

ERA-P [A] [B] [C] [D] [E] [F] [G] [H] [I] [J] [K] [L] [M] [N]

EXAMPLE ERA-P [L] [82] [SS] [6] [40K] [8] [1] [UNV] [S1] [W] [9C] [24] [WC, WF]

OPTIONS

[O, P (Multiple Selections)]

A. MODEL	B. SHIELDING	C. DISTRIBUTION	D. OUTPUT	E. LENGTH	F. COLOR TEMPERATURE
Q ERA -P	Q L Satin Lens Q DB Drop Baffle Q FB Flush Baffle	Q 82 80% Indirect, 20% Direct Q 64 60% Indirect, 40% Direct Q 55 50% Indirect, 50% Direct Q 37 30% Indirect, 70% Direct Q 28 20% Indirect, 80% Direct Q 01 0% Indirect, 100% Direct	Q SS Super SAVER Q HO High Output Q VHO Very High Output	Q 4 4 ft (48 in) Q 8 8 ft (96 in) Q XXX System Run	Q 30K 3000K Q 35K 3500K Q 40K 4000K WCT White Color Tuning 2700K - 6500K

NOTES	
Consult factory for variations	For delivered lumens, see below.
Consult factory for 90 CRI.	WCT - max lm/ft is 1000 based on 80 CRI and 4000K. Other CCT's are available consult factory.

G. CRI	H. CIRCUIT	I. VOLTAGE	J. DRIVER	K. FINISH	L. MOUNTING
Q 8 80+ CRI Q 9 90+ CRI	Q 1 1-Circuit Q 2A/B 2-Circuit	Q UNV 120-277v Q 347 347v	Q S1 1% Dimming (0-10v) Q LDE1 Lutron Hi-Lume 1% Fade to Black Q ELO 0.1% EldoLED Q DXL 1% Dixel	Q W White Q B Black Q S Silver Q CC Custom Colors	Q 9C 9/16 in Tee Clip Q 15C 15/16 in Tee Clip Q SC Screw Slot Tee Clip Q HC Hard Ceiling

Consult factory for custom colors. (power feeds and canopies excluded)

347 may not be available in all configurations.

AWNR-W, AWNR-B, VDO, VRF, SPD, & CLM options supplied with DXL driver standard.

90 CRI option has an R9 value greater than 60.

OPTIONS

M. SUSPENSION LENGTH	N. POWER FEEDS & CANOPIES	O. CONTROLS & FACTORY OPTIONS	P. QUICKSHIP
Q 24 24 in Q 42 42 in Q 102 102 in Q 150 150 in	Q WF White Power Feed Q BF Black Power Feed Q SF Silver Power Feed Q WC White Canopy Q BC Black Canopy Q SC Silver Canopy	Q NONE Leave Blank Q AWNR-W Lutron Athena Wireless Node (RF-only) in White Q AWNR-B Lutron Athena Wireless Node (RF-only) in Black Q VDO Lutron Vive (RF/Daylight/Occ) Q VRF Lutron Vive RF Fixture Control Q SPD Osram SensiLUM Daylight/Harvest/Occ	Q QS10 QuickShip 10 - Day (Depletion Policy: Subject to Availability)
		CLM Osram Connecting Light Module (CLM) DAY Wattstopper Daylight Sensor (FD-301) OCC Wattstopper Occ Sensor (FS-205v2) DOC Enlighted Daylight/Harvesting Occ (SU-5E-01)	
		Q EB Emergency Battery (10-Watt) Q EC Emergency Circuit Q NL Night Light Circuit Q SLP Slope Ceiling	

Each individual suspension length is adjustable.


Select feed and canopy choice.

AWNR-W, AWNR-B, VDO, VRF, SPD, & CLM options supplied with DXL driver standard. EB option only available for lengths 4ft or greater.

Please see note on p.2 for further details regarding QuickShip.

May choose more than one option in this category.


80/20 - 80 CRI- HIGH OUTPUT PERFORMANCE

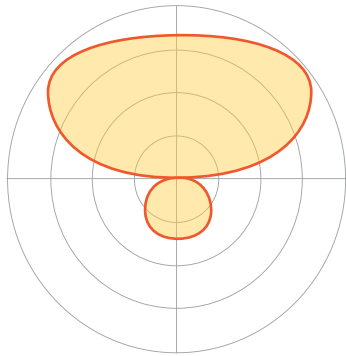

OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	6.33	3376	133
	3500	6.33	3435	136
	4000	6.33	3552	140
HO	3000	8.53	4315	127
	3500	8.53	4390	129
	4000	8.53	4540	133
VHO	3000	10.43	5189	124
	3500	10.43	5280	127
	4000	10.43	5460	131

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens


60/40 - 80 CRI- HIGH OUTPUT PERFORMANCE

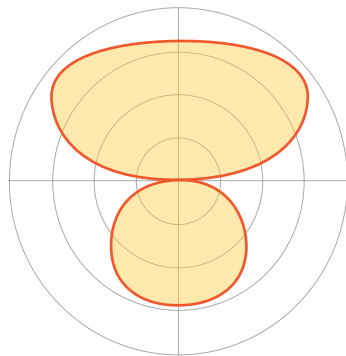

OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	6.33	3179	126
	3500	6.33	3234	128
	4000	6.33	3345	132
HO	3000	8.53	3927	115
	3500	8.53	3996	117
	4000	8.53	4132	121
VHO	3000	10.43	4758	114
	3500	10.43	4840	116
	4000	10.43	5005	120

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens

50/50 - 80 CRI- HIGH OUTPUT PERFORMANCE

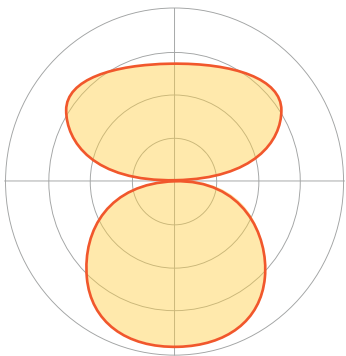


OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	6.33	3039	120
	3500	6.33	3092	122
	4000	6.33	3198	126
HO	3000	8.53	3835	112
	3500	8.53	3902	114
	4000	8.53	4035	118
VHO	3000	10.43	4451	107
	3500	10.43	4528	109
	4000	10.43	4683	112

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens




30/70 - 80 CRI- HIGH OUTPUT PERFORMANCE

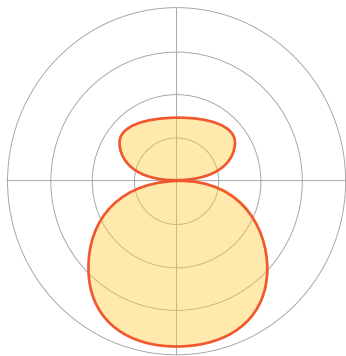

OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	6.33	2547	101
	3500	6.33	2591	102
	4000	6.33	2679	106
HO	3000	8.53	3535	104
	3500	8.53	3596	105
	4000	8.53	3719	109
VHO	3000	10.43	4143	99
	3500	10.43	4215	101
	4000	10.43	4359	105

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens


20/80 - 80 CRI- HIGH OUTPUT PERFORMANCE

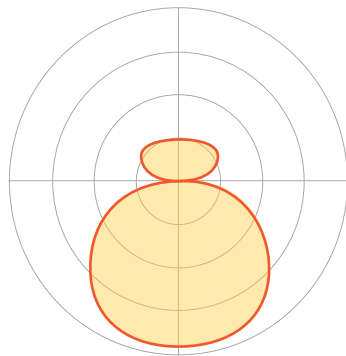

OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	6.33	2456	97
	3500	6.33	2499	99
	4000	6.33	2584	102
HO	3000	8.53	3355	98
	3500	8.53	3413	100
	4000	8.53	3529	103
VHO	3000	10.43	4390	105
	3500	10.43	4466	107
	4000	10.43	4618	111

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens

0/100 - 80 CRI- OUTPUT PERFORMANCE

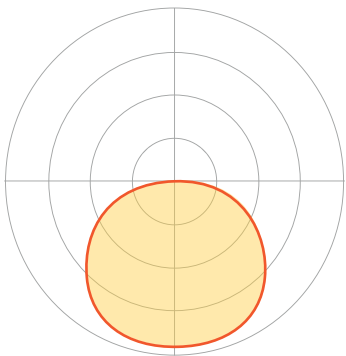

OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	6.33	2106	83
	3500	6.33	2143	85
	4000	6.33	2216	88
HO	3000	8.53	2817	83
	3500	8.53	2866	84
	4000	8.53	2964	87
VHO	3000	10.43	3642	87
	3500	10.43	3705	89
	4000	10.43	3831	92

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens



LIGHT SOURCE

Long life name brand LED chips and boards to ensure the highest of quality while providing even and smooth illumination throughout our luminaires.

Our luminaires are available in 2700K, 3000K, 3500K and 4000K color temperature as well as White Color Tuning (2700-6500K).

Optional 80CRI or 90CRI available in all CCT options.

LUMEN MAINTENANCE

The projected lumen maintenance of the name brand mid-powered LED's are projected to maintain 80% (L80) of their initial output for +80,000 hours.

CONSTRUCTION

Lux Illuminaire housings are constructed of 20 gauge cold-rolled steel. Our internal joiner system is designed to the highest of standards to ensure our precision cut housings align and fit tightly without light leak. End caps are laser cut for a precise fit.

FINISH

Polyester powder, low gloss textured paint finish applied after a multi-stage pretreatment. Standard luminaire finishes include white, silver, and black. Custom color options are available. (Consult Factory).

OPTICS

Frosted acrylic lens

DRIVERS

All of our luminaires come standard with 1% dimming and THD <20% utilizing 0-10v constant current protocol. 120v/277v is standard with the option of 347v. Driver ambient operating temperature -30°C to +50°C.

EMERGENCY

An integral factory installed 10 watt emergency battery pack. Emergency circuit and Night Light circuit options are available.

LUMINAIRE LENGTH

Our ERA Pendant Direct/Indirect luminaire series are available in 4', and 8', individual lengths or continuous row configurations. Continuous row configurations are joined together on-site utilizing the joiner kits provided.

LUMINAIRE WEIGHT

The approximate weight of a four foot luminaire is 13.95 lbs including end caps assembled.

QUICKSHIP






Indicates QuickShip option 10-day lead times.

Up to 500 linear feet or 100 individual luminaires. Consult Factory for larger projects.

PLEASE NOTE:

- 10-day lead times do not include weekends or holidays.
- A clean order must be received by 12:00 PM EST. All orders received after 12:00 PM EST will be entered the following day.
- Changing orders of any kind will require a new ESD.
- All QuickShip items must be on a separate PO.

CROSS SECTION



CONTINUOUS RUN ORDER GUIDES

Please use the following run guides for fixture ordering. If your product will require a submittal, our in-house Application Engineering Team will work closely with you on your project.

STEEL PRODUCT ORDER GUIDE	
RUN LENGTH (ft)	RUN CONFIGURATION - SECTION LENGTHS
12	8' + 4'
16	8' + 8'
20	8' + 4' + 8'
24	8' + 8' + 8'
28	8' + 8' + 8' + 4'
32	8' + 8' + 8' + 8'
36	8' + 8' + 4' + 8' + 8'
40	4' + 8' + 8' + 8' + 8' + 4'
44	8' + 8' + 8' + 8' + 8' + 4'
48	8' + 8' + 8' + 8' + 8' + 8'
52	8' + 8' + 8' + 8' + 8' + 8' + 4'

